




IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
UTILITY PATENT APPLICATION TRANSMITTAL LETTER

Handwritten mark resembling a stylized 'f' or '7'.

To: Assistant Commissioner for Patents
Box Patent Application
Washington D.C., 20231



Dear Assistant Commissioner:



Transmitted herewith for filing under 37 C.F.R. §1.53(b) is a Nonprovisional Utility Patent Application for a New Application entitled:

MECHANICALLY ROBUST PAD INTERFACE AND METHOD THEREFOR by:

Scott K. Pozder et al.

The filing fee is calculated as follows:

CLAIMS AS FILED AFTER AMENDING THE APPLICATION
AS SET FORTH IN THE PARAGRAPHS BELOW

FOR	NUMBER OF CLAIMS	NUMBER EXTRA	RATE	FEE
TOTAL CLAIMS	23 - 20 =	3	x \$18 =	\$ 54.00
INDEPENDENT CLAIMS	2 - 3 =	0	x \$78 =	0.00
MULTIPLE DEPENDENT CLAIMS			\$260	0.00
BASIC FEE				760.00
TOTAL FILING FEE				\$ 814.00

Please charge Deposit Account No. 13-4773 for any fees required, or credit Deposit Account No. 13-4773 for any refunds. One copy of this page is enclosed for deposit account purposes.

Enclosed are:

- ☒ 4 sheets of drawings and 19 pages of specification.
- ☒ Newly executed Combined Declaration and Power of Attorney.
- ☐ Copy of declaration from prior United States Patent Application No. _____ filed on _____.
- ☒ A paper entitled "Authorization for Fees Under 37 C.F.R. §§1.16 and 1.17 and Petitions for Extensions of Time."
- ☒ A Recordation Form Cover Sheet and an Assignment of the invention.
- ☐ Preliminary amendment.
- ☐ Enter the unentered 37 C.F.R. §1.116 amendment filed in the prior application.
- ☒ Information Disclosure Citation (Form PTO-1449) and copies of the cited references therein (other than pending U.S. patent applications) are enclosed.
- ☒ A Return Postcard specifically listing all enclosures.

☐ Incorporation by Reference (for Continuation/Division application). The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein. Because the present application is based on a prior U.S. patent application, please amend the specification by adding the following sentence before the first sentence of the specification:

"This is based on prior United States Patent Application No. 09/000,000, filed on January 1, 1999, which is hereby incorporated by reference, and priority thereto for common subject matter is hereby claimed."

☐ Cancel claims _____ of the prior application before calculating the filing fee.

☐ Priority of patent application number _____ filed on _____ in _____ is hereby claimed under 35 U.S.C. §119.

A certified copy of the foreign patent application has previously been sent.

☐ Priority of U.S. Patent Application No. _____ filed on _____ is hereby claimed under 35 U.S.C. §119(e).

☐ Priority of U.S. Patent Application No. _____ filed on _____ is hereby claimed under 35 U.S.C. §120.

_____ This Application is being filed by fewer than all the inventors named in the prior application. Amend the current Application by deleting the following inventors pursuant to 37 C.F.R. §1.53: _____.

_____ An assignment has been previously submitted and recorded.

_____ Other:

Please forward all correspondence to:

Harry A. Wolin
Austin Intellectual Property Law Section
7700 West Parmer Lane
MD: TX32/PL02
Austin, Texas 78729

11-18-99

Date



Robert A. Rodriguez
Attorney for Applicants
Registration No. 45-049
Telephone No. (512) 996-6839
Facsimile No. (512) 996-6854

MECHANICALLY ROBUST PAD INTERFACE AND METHOD
THEREFOR

5

Field of the Invention

The invention relates generally to integrated circuits and more particularly to a mechanically robust bond pad interface used in integrated
10 circuits.

Related Applications

The present Application is related to United States Patent Application No. 09/411,266 filed October 4, 1999, and entitled "Semiconductor Device
15 and Method of Formation," which is assigned to the assignee hereof and is herein incorporated by reference.

Background of the Invention

20 Integrated circuits are formed on semiconductor substrates using a number of different processing operations that create the circuit elements. In order to access circuitry associated with the semiconductor substrate, bond pads are formed on the integrated circuits. Bond pads provide the means for transfer of electrical signals and power from and to the die via probe needles,
25 bonding wires, conductive bumps, etc..

Bond pads are typically formed of a conductive metal such as aluminum, copper, or some alloy thereof. Copper is often used for the metal layers within the integrated circuit because of its improved electromigration performance and ability to support higher current density as compared to
30 aluminum. However, copper is a non-self-passivating metal, and oxidation

or corrosion of copper bond pads can occur when the die is exposed to the atmosphere or a non-hermetic package allows moisture to interact with the copper bond pad. This corrosion can degrade the ability to bond leads or bumps to the bond pads and can also cause the bond to decay and fail over
5 time. In contrast, aluminum is self-passivating and, therefore, more resistant to degradation from atmospheric exposure. As such, aluminum is typically used to form bond pads.

In order to realize the advantages of the self-passivating character of aluminum and the superior electrical characteristics of copper, composite
10 bond pad structures can be used in integrated circuit designs. In composite bond pad structures, copper is used for the underlying layer of the pad that interfaces with other layers in the integrated circuit. A corrosion-resistant aluminum capping layer is formed on top of the copper portion that creates a hermetic seal that protects the copper portion from atmospheric exposure. In
15 order to physically separate the copper and aluminum portions of the composite bond pad while allowing for electrical connectivity, a relatively thin barrier metal layer may be formed at the interface.

Problems can arise in composite bond pad structures when test and probe operations are performed. To achieve good electrical continuity with
20 the bond pad, elements such as probing needles must exert forces that can damage or displace portions of the bond pad surface. As such, the physical contact by such elements can damage the interface between the different metals comprising the composite bond pad structure. The damage produced can result in the formation of intermetallics at the copper-aluminum interface
25 if the barrier is broken between the underlying copper layer and the aluminum capping layer. The aluminum-copper intermetallic can have undesirable characteristics including reduced physical strength and increased resistivity. In addition, if the probe exposes the underlying copper to the external ambient conditions, degradation of the copper can occur.

Another problem that can arise with bond pad structures concerns the physical force exerted on the bond pad by a probing element propagating to lower layers based on the physical couplings within the integrated circuit. Low Young's modulus dielectrics underlying the bond pad may not be able to support such stress resulting from the force propagation. Magnification of applied forces due to leveraging by extended interconnect may result in mechanical and eventual electrical failure of the semiconductor device. Such degradation due to the magnified applied forces typically occurs at interfaces within the integrated circuits such as via to metal interfaces and the like.

Damage due to the application of force may also be increased when a more pliable dielectric (that having a lower Young's modulus or yield strength) surrounds the components being stressed.

Therefore, a need exists for a composite bond pad structure that is mechanically robust such that forces applied by probing or packaging operations do not cause degradation of the bond pad or propagate to internal portions of the integrated circuit where other undesirable effects may occur.

Brief Description of the Drawings

The present invention is illustrated by way of example and not limitation in the accompanying figures, in which like references indicate similar elements, and in which:

FIG. 1 illustrates a cross sectional view of a portion of a semiconductor die that includes a partially formed composite bond pad in accordance with a particular embodiment of the present invention;

FIG. 2 illustrates a cross sectional view of a semiconductor die that includes a composite bond pad in accordance with a particular embodiment of the present invention;

FIG. 3 illustrates a cross sectional view of another composite bond pad as implemented in accordance with an alternate embodiment of the present invention;

FIG. 4 illustrates a top down view of the bond pad illustrated in FIG. 3;

FIG. 5 illustrates a plurality of top down views corresponding to potential support structure configurations corresponding to composite bond pads in accordance with the present invention; and

FIG. 6 illustrates a flow diagram of a method for forming a composite bond pad in accordance with a particular embodiment of the present invention.

Skilled artisans appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of embodiments of the present invention.

Detailed Description of the Drawings

5 Generally, the present invention provides a composite bond pad that is resistant to external forces that may be applied during probing operations, packaging operations, or other similar post-fabrication operations that utilize the bond pads. The composite bond pad includes a non-self-passivating conductive bond pad that is formed over a semiconductor substrate. A
10 dielectric layer is then formed over the conductive bond pad. Portions of the dielectric layer are removed such that the dielectric layer becomes perforated and a portion of the conductive bond pad is exposed. Remaining portions of the dielectric layer form support structures that overlie that bond pad. A self-passivating conductive capping layer is then formed overlying the bond pad
15 structure, where the perforations in the dielectric layer allow for electrical contact between the capping layer and the exposed portions of the underlying bond pad. The support structures provide a mechanical barrier that protects the interface between the capping layer and the bond pad. Additional mechanical robustness is achieved when the support structures remain
20 coupled to the unremoved portion of the dielectric layer, as forces buffered by the support structures are distributed across the dielectric layer and not concentrated at the bond pad location.

 In probing operations, the support structures prevent probing elements such as needles from penetrating through the capping layer and disturbing
25 the interface between the capping layer and the conductive bond pad. If a probe needle manages to displace a large amount of the capping layer, electrical contact between bond wires or other packaging structures is still possible as conductive material remains within the perforations of the dielectric layer. In addition to these advantages, by configuring the
30 perforated dielectric layer such that mechanical forces applied to the capping

layer are distributed across a greater surface area of the dielectric layer, the potential for internal degradation of the integrated circuit due to a point application of force is greatly reduced.

In an alternate embodiment, additional mechanical support is obtained through the use of dielectric studs that are included in the conductive bond pad portion (inlaid metal portion) of the composite bond pad. Such studs are commonly used in the art to alleviate dishing (uneven metal removal) during polishing operations. The added mechanical support is further improved when the studs are positioned beneath the support structures of the perforated dielectric layer. In some cases, the studs may also increase the adhesion of the capping layer to the underlying bond pad structure.

The invention can be better understood with reference to FIGs. 1-6. FIG. 1 includes an illustration of a cross sectional view of a portion of a semiconductor device. The semiconductor device includes a semiconductor device substrate 100, field isolation regions 102, and doped regions 104 formed within the semiconductor device substrate 100. A gate dielectric layer 106 overlies portions of the semiconductor device substrate 100, and a gate electrode 110 overlies the gate dielectric layer 106. Spacers 108 are formed adjacent the sidewalls of the gate electrode 110. A first interlevel dielectric layer (IDL) 116 is patterned to form a contact opening that is filled with an adhesion layer 112 (optional) and a contact fill material 114. The adhesion layer 112 is typically a refractory metal, a refractory metal nitride, or a combination of refractory metals or their nitrides. The contact fill material 114 typically includes tungsten, polysilicon, or the like. After depositing the adhesion layer 112 and the contact fill material 114, the substrate is polished to remove portions of the adhesion layer 112 and contact fill material 114 not contained within the contact opening to form the conductive plug 111.

A first level interconnect 120 is then formed overlying the interlevel dielectric (ILD) layer 116 and the conductive plug 111. The first level

interconnect 120 can be formed using a combination of trench and polishing processes or, alternatively, using a combination of patterning and etching processes. If the first level interconnect 120 is formed using copper, a barrier (not shown) may be formed adjacent to the first level interconnect 120 to

5 reduce the migration of copper into surrounding materials.

In accordance with one embodiment, the first level interconnect 120 is formed as a single inlaid structure. As such, the first level interconnect 120 is created by first depositing a portion of the second ILD 118 which is then etched to form a trench in which the material that makes up the first level
10 interconnect 120 is deposited. Once deposition of the first level interconnect 120 occurs, a polishing process removes any excess material that remains outside of the trench formed.

Assuming that the first level interconnect 120 has been formed as a single inlaid structure, the remainder of the second ILD 118 is formed
15 subsequent to the polishing step. An interconnect 126 that can include a conductive adhesion/barrier film 122 and a copper material 124 is then formed within the second ILD 118. The adhesion/barrier film 122 is typically a refractory metal, a refractory metal nitride, or a combination of refractory metals or their nitrides. The copper fill material 124 is typically
20 copper or a copper alloy, where the copper content is at least 90 atomic percent. The copper can be alloyed with magnesium, sulfur, carbon, or the like to improve adhesion, electromigration or other properties of the interconnect. Although the interconnect 126 is illustrated in this embodiment as a dual inlaid interconnect, one of ordinary skill in the art recognizes that
25 the interconnect 126 can alternatively be formed as a conductive plug in combination with a single inlaid interconnect or a lithographically patterned and etched interconnect. After depositing the adhesion barrier film 122 and the copper fill material 124, the substrate is polished to remove portions of adhesion/barrier film 122 and copper fill material 124 not contained within

the dual inlaid opening to form the dual inlaid interconnect 126 shown in FIG. 1.

A third ILD 130 is then formed over the second ILD 118 and the dual inlaid interconnect 126. The third ILD 130 and any other underlying dielectric layers can include materials such as tetraethylorthosilicate (TEOS), silicon nitride, silicon oxynitride, phosphosilicate glass (PSG), borophosphosilicate glass (BPSG), low dielectric constant materials such as xerogel, aerogel, polyimide, parylene, biscyclobutenes, fluorocarbons, polyarylether-based materials, spin on glass, polysiloxanes, silsesquioxanes, carbon-containing silicon oxide, carbon and hydrogen containing silicon oxide, or a combination thereof. The third ILD 130 and any other underlying dielectric layers can include a material that has a Young's modulus that is less than approximately 50 Giga Pascals. In other embodiments, the third ILD 130 may be formed of other materials that have a lower yield strength and are therefore more pliable. Although the portion of the semiconductor device illustrated in FIG. 1 includes three layers of interconnect, a plurality of interconnect layers could be interspersed between the device layer and the top most layer which is used to provide bond pad access to the semiconductor device. In the embodiment illustrated in FIG. 1, the bond pad structure is formed within the uppermost (third) ILD 130.

The uppermost interconnect level 133, which includes the conductive bond pad 134 is then formed within the third ILD 130 in a manner similar to that used to form the interconnect 126 within the second ILD 118. Typically, the uppermost interconnect level 133 includes mostly copper, but in other embodiments, a self-passivating material such as aluminum may be used. As was the case with the copper fill material 124 of the interconnect 126, the fill material used to form the uppermost interconnect level 133 may be separated from the third ILD 130 by a conductive adhesion/barrier film 132. In accordance with one embodiment, the conductive bond pad 134 is positioned

some distance from the via (interlevel interconnect), which is used to contact the interconnect 126. This is represented by distance X illustrated in FIG. 1.

A dielectric (passivation) layer 136 is then formed over the uppermost interconnect level 133 and the conductive bond pad 134. Typically, the

5 dielectric layer 136 is formed of a nitrogen-containing compound.

Alternatively, the dielectric layer can include silicon oxide, silicon oxynitride, a hydrogen and carbon containing silicon oxide, or the like.

Portions of the dielectric layer are removed to form a perforated region within the dielectric layer that includes a plurality of support structures 138.

10 The perforated region is formed to overlie the conductive bond pad 134 in the area in which the composite bond pad is to be formed such that a portion of the conductive bond pad 134 is exposed. In some embodiments, the plurality of support structures 138 remain connected to portions of the dielectric layer 134 which have not been removed.

15 Formation of the composite bond pad is continued in FIG. 2. FIG. 2 illustrates a cross sectional view of the portion of the semiconductor device illustrated in FIG. 1 after subsequent processing steps. In accordance with one embodiment, a barrier layer 202, which may include tantalum, titanium, tungsten, chromium, or the nitrides of these materials is formed within the perforated portion of the dielectric layer 136. A conductive capping layer 204 is then formed over the plurality of support structures 138. Typically, the conductive capping layer includes a self-passivating material such as aluminum. The conductive capping layer 204 may also include nickel or palladium. The conductive capping layer 204 may subsequently be attached to a wirebond or electrically coupled to a conductive bump during packaging of the semiconductor device.

25 The perforations in the dielectric layer 136 permit electrical contact between the self-passivating material that makes up the capping layer 204 and the conductive bond pad 134. However, the support structures 138 provide mechanical shielding of the interface formed between the capping

30

layer 204 and the conductive bond pad 134. Note that if the support structures 138 are interconnected with unremoved portions of the dielectric layer 136, additional mechanical shielding of the semiconductor device with respect to external forces is achieved. This is because external forces applied at the capping layer 204 of the composite bond pad will be distributed across the dielectric layer 136. The external forces may be the result of probing, wire bonding, bumping, packaging, etc.

In order to provide stress relief between the semiconductor device and the packaging material used in conjunction with the semiconductor device, a polyimide layer 206 may be formed on the semiconductor device after the composite bond pad structures has been completed. The inclusion of the polyimide layer 206 is an optional step that is dependent upon the particular manufacturing process employed.

FIG. 3 illustrates an alternate embodiment of the invention that includes a plurality of dielectric studs 302 within the conductive bond pad portion 134 of the composite bond pad structure. As is illustrated, the dielectric studs 302 are typically positioned beneath the support structures 138 within the perforated portion of the dielectric layer 136. Positioning the dielectric studs 302 beneath the support structures 138 increases the mechanical support provided to the support structures 138 such that the robust nature of the composite bond pad structure is enhanced. This enhancement is due to the transference of force from the support structures 138 through the dielectric studs 302 to the third ILD 130. The positioning of the dielectric studs 302 beneath the support structures 138 is also advantageous in that it does not reduce the contact area provided for the interface between the capping layer 204 and the conductive bond pad 134.

FIG. 4 illustrates a top down view of the composite bond pad structure of FIG. 3 (the capping layer is assume to be transparent for purposes of illustration). As is illustrated, the dielectric studs 302 are included in the composite bond pad structure in an arrayed format. The support structures

138 included in the perforated portion of the dielectric layer 136 are shown
as strips of dielectric material that extend across the length of the bond pad
structure. Although the bond pad structure of FIG. 4 is shown to be
generally square, it should be apparent to those of ordinary skill in the art
5 that various shaped bond pad structures may be implemented.

FIG. 5 illustrates a plurality of alternate perforation patterns that may
be utilized to enable the capping layer to electrically connect with the bond
pad portion of the composite bond pad structure while providing a degree of
physical isolation with respect to the interface between these two portions of
10 the composite bond pad structure. Each of the different patterns includes
advantages that may be desirable for different embodiments. The perforation
layout pattern 510 provides an array of via connections between the capping
layer and the bond pad portion. Because the majority of the passivation
(dielectric) layer in the perforation layout pattern 510 is left intact, the force
15 tolerance when using this pattern may be relatively greater than other
patterns illustrated.

The floating grid pattern 520 provides an isolated support structure
portion that effectively floats without physical connection to the remaining
portion of the dielectric layer. The floating grid pattern 520 provides
20 additional robustness with respect to sheer stress that may be applied to the
capping layer. However, the area over which the force applied is distributed
is reduced from those patterns that remain attached to the remaining portion
of the dielectric layer.

The variable density grid structure 530 may provide advantages in
25 terms of steering probe needles or other testing apparatus to particular
portions of the bond pad structure. This is accomplished due to the uneven
topography of the metal layer that may be caused by the presence or absence
of dielectric material. Large gaps between support structures may permit
metal to be deposited in an uneven manner that can leave less metal material
30 in the larger gaps and therefore a lower topography as the metal fills the gap

rather than building up on the dielectric support structure. Typically, the pattern is designed such that an indentation is created at a central portion or other desirable location of the composite bond pad structure such that the probe needle will migrate toward this depressed area.

5 The floating free-end grid pattern 540 may provide some of the advantages that were provided by the floating grid structure 520 with respect to sheer stresses while maintaining a physical link to the overall dielectric layer. As such, the sheer stress robustness may not be as great as that of a floating grid pattern 520, but the distribution of applied force is maintained
10 over a broader area.

 The variable density chevron grid 550 may provide an alternate pattern for steering a probe needle or similar testing device to a particular location on the bond pad structure. In the case of the variable density
15 tracts of metal material such that a probe needle will contact the structure and be directed by the furrows to a preferred area of the bond pad.

 FIG. 6 illustrates a flow diagram of a method for forming a semiconductor device that includes a composite bond pad structure. The method begins at step 602 where a conductive bond pad is formed over a
20 semiconductor substrate. Typically, the conductive bond pad is mostly copper in composition. Formation of the conductive bond pad may include forming dielectric studs within the conductive bond pad. As was described with respect to FIG. 3, the dielectric studs may provide additional physical support to the composite bond pad structure.

25 At step 604, a dielectric layer (passivation layer) is formed over the conductive bond pad. At step 606, portions of the dielectric layer are removed to form a plurality of support structures that overlie the bond pad. Typically, the step of removing the portions is accomplished through etching the dielectric layer. Removing portions of the dielectric layer also exposes a
30 portion of the bond pad to permit electrical coupling.

At step 608 a conductive capping layer is formed overlying the plurality of support structures. The conductive capping layer electrically contacts a portion of the bond pad, where the electrical contact occurs where portions of the first dielectric layer have been removed to expose the bond pad. The conductive capping layer may include aluminum, or may also be constructed of a material such as nickel or platinum.

As was described with respect to the cross section of FIG. 2, the capping layer may be separated from the conductive bond pad by a barrier layer. Typically, the barrier layer is formed of a material such as tantalum, titanium, tungsten chromium, or the nitrides of these materials. At step 610 the capping layer is etched to form the composite bond pad structure.

By including a perforated dielectric layer between a capping layer and an underlying bond pad of a composite bond pad structure, electrical connectivity between the conductive layers of the bond pad structure is maintained while providing some level of physical isolation between the conductive structures. As such, problems resulting from damage to the interface between the capping layer and the bond pad which may have resulted from probe needles in prior art bond pad structures are avoided. In addition, forming the capping layer with a self-passivating material ensures that degradation due to corrosion or other environmentally induced effects is minimized. Support structures in the perforated dielectric layer also help buffer external forces such that damage to the semiconductor device is avoided.

In the foregoing specification, the invention has been described with reference to specific embodiments. However, one of ordinary skill in the art appreciates that various modifications and changes can be made without departing from the scope of the present invention as set forth in the claims below. Accordingly, the specification and figures are to be regarded in an illustrative rather than a restrictive sense, and all such modifications are intended to be included within the scope of present invention.

Benefits, other advantages, and solutions to problems have been described above with regard to specific embodiments. However, the benefits, advantages, solutions to problems, and any element(s) that may cause any benefit, advantage, or solution to occur or become more pronounced are not to be construed as a critical, required, or essential feature or element of any or all the claims. As used herein, the terms "comprises," "comprising," or any other variation thereof, are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus.

Claims

1. A method for forming a semiconductor device, comprising:
forming a conductive bond pad over a semiconductor substrate;
5 forming a dielectric layer over the conductive bond pad;
removing portions of the dielectric layer; wherein removing portions
of the first dielectric forms a plurality of support structures that
overlie the conductive bond pad, and wherein removing
portions of the dielectric layer exposes a portion of the
10 conductive bond pad; and
forming a conductive capping layer overlying the plurality of support
structures, wherein the conductive capping layer electrically
contacts a portion of the conductive bond pad.
- 15 2. The method of claim 1, wherein the conductive bond pad comprises
mostly copper.
3. The method of claim 2, further comprising forming dielectric studs within
the conductive bond pad, wherein at least a portion of a support
20 structure overlies a portion of a dielectric stud.
4. The method of claim 1, wherein the dielectric layer includes a material
selected from a group consisting of a nitride and a hydrogen and
carbon containing silicon oxide.
- 25 5. The method of claim 1, wherein the plurality of support structures are
interconnected with unremoved portions of the dielectric layer.
6. The method of claim 5, wherein forming the conductive bond pad further
30 comprises forming the conductive bond pad over at least one

dielectric layer having a Young's modulus less than approximately 50 Giga Pascals.

7. The method of claim 5, wherein forming the conductive bond pad further
5 comprises forming the conductive bond pad over at least one
dielectric layer having low yield strength.

8. The method of claim 1, further comprising forming a barrier layer
between the capping layer and the conductive bond pad.

10

9. The method of claim 8, wherein the barrier layer includes a material
selected from a group consisting of tantalum, titanium, tungsten, and
chromium.

15 10. The method of claim 1, wherein the conductive capping layer includes
aluminum.

11. The method of claim 1, wherein the conductive capping layer includes a
material selected from the group consisting of nickel and palladium.

20

12. A semiconductor device comprising:
a conductive bond pad over a semiconductor substrate;
a dielectric layer over the conductive bond pad;
a plurality of support structures overlying the conductive bond pad;
25 and
a conductive capping layer overlying the plurality of support
structures, wherein the conductive capping layer electrically
contacts a portion of the conductive bond pad.

13. The semiconductor device of claim 12, wherein the conductive bond pad comprises mostly copper.
14. The semiconductor device of claim 12, further comprising a dielectric stud within the conductive bond pad, wherein the at least a portion of at least one of the plurality of support structures overlies a portion of the dielectric stud.
15. The semiconductor device of claim 12, wherein the dielectric layer includes a material selected from a group consisting of a nitride and a hydrogen and carbon containing silicon oxide.
16. The semiconductor device of claim 12, wherein at least a portion of the plurality of support structures is interconnected with unremoved portions of the dielectric layer.
17. The method of claim 16, further comprising at least one dielectric layer below the conductive bond pad having a Young's modulus less than approximately 50 Giga Pascals.
18. . The semiconductor device of claim 12, further comprising a barrier layer between the capping layer and the conductive bond pad.
19. The semiconductor device of claim 12, wherein the barrier layer includes a material selected from a group consisting of tantalum, titanium, tungsten, and chromium.
20. The semiconductor device of claim 12, wherein the conductive capping layer includes aluminum.

21. The semiconductor device of claim 12, wherein the conductive capping layer includes a material selected from the group consisting of nickel and palladium.

5 22. The semiconductor device of claim 12, further comprising a wirebond attached to the conductive capping layer.

23. The semiconductor device of claim 12, further comprising a conductive bump electrically connected to the conductive capping layer.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

MECHANICALLY ROBUST PAD INTERFACE AND METHOD THEREFOR

Abstract

5 A composite bond pad that is resistant to external forces that may be applied during probing or packaging operations is presented. The composite bond pad includes a non-self-passivating conductive bond pad (134) that is formed over a semiconductor substrate (100). A dielectric layer (136) is then formed over the conductive bond pad (134). Portions of the dielectric layer
10 (136) are removed such that the dielectric layer (136) becomes perforated and a portion of the conductive bond pad (134) is exposed. Remaining portions of the dielectric layer (136) form support structures (138) that overlie that bond pad. A self-passivating conductive capping layer (204) is then formed overlying the bond pad structure, where the perforations in the
15 dielectric layer (136) allow for electrical contact between the capping layer (204) and the exposed portions of the underlying bond pad (134). The support structures (138) provide a mechanical barrier that protects the interface between the capping layer (204) and the bond pad (134). Additional mechanical robustness is achieved when the support structures
20 (138) remain coupled to the unremoved portion of the dielectric layer (136), as forces buffered by the support structures (138) are distributed across the dielectric layer (136) and not concentrated at the bond pad location.

25

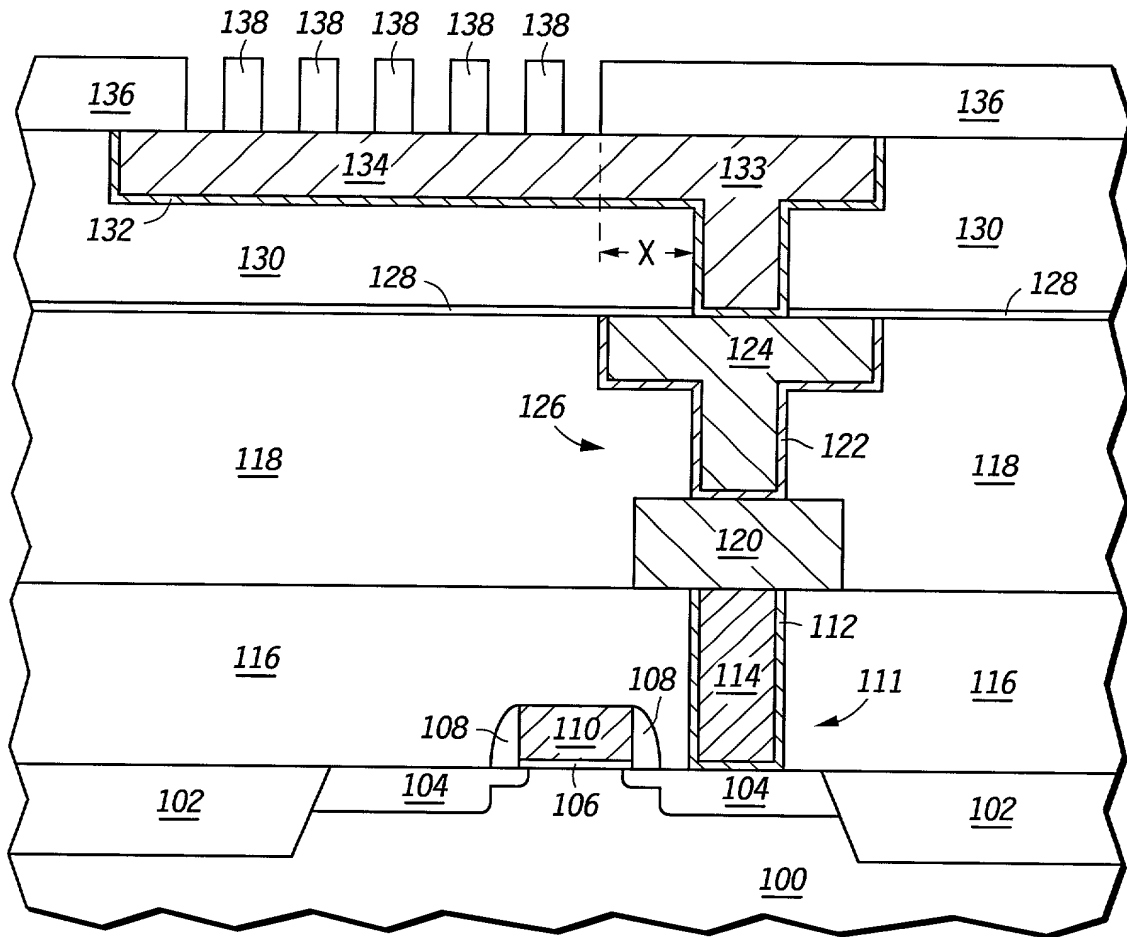


FIG.1




FIG.2

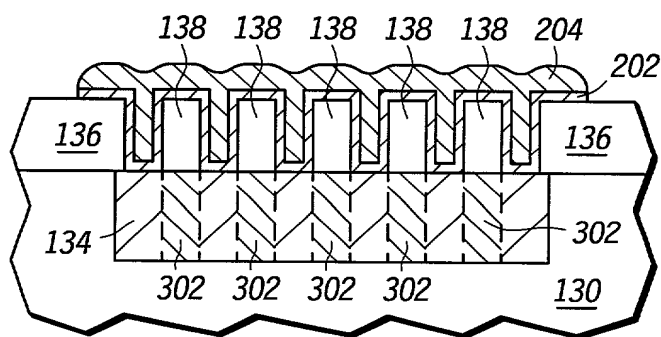


FIG. 3



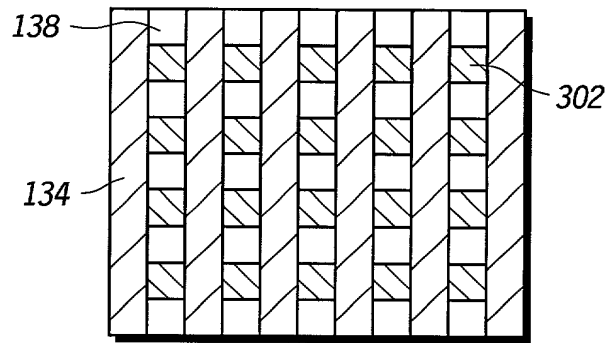


FIG. 4


VIA LAYOUT
510




FLOATING GRID
520

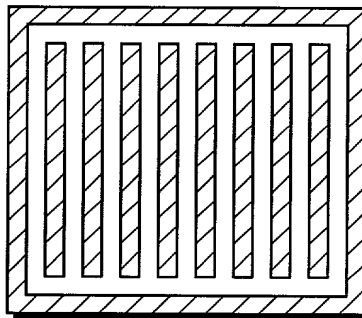

VARIABLE DENSITY
GRID 530



FLOATING FREE-END
GRID 540

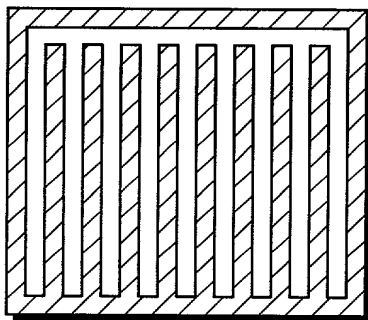

VARIABLE DENSITY
CHEVRON GRID 550




FIG. 5

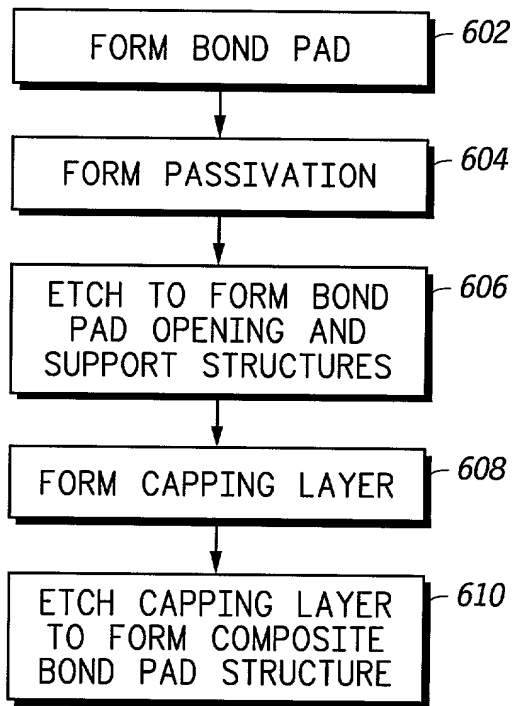


FIG. 6

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

Attorney Docket SC10861TP

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled MECHANICALLY ROBUST PAD INTERFACE AND METHOD THEREFOR, the specification of which is attached hereto unless the following line is marked:

_____ Application was filed on _____
as Application No. _____
and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		Priority Claimed
		_____ Yes _____ No
(Number)	(Country)	(Day/Month/Year Filed)
		_____ Yes _____ No
(Number)	(Country)	(Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the

prior United States application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
----------------------	---------------	---

(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
----------------------	---------------	---


I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:


Harry A. Wolin, Reg. No. 32,638; James L. Clingan, Reg. No. 30,163; Robert L. King, Reg. No. 30,185; Paul J. Polansky, Reg. No. 33,992; M. Kathryn Braquet Tsirigotis, Reg. No. 34,127; George R. Meyer, Reg. No. 35,284; Lee E. Chastain, Reg. No. 35,479; Daniel D. Hill, Reg. No. 35,895; Susan C. Hill, Reg. No. 35,896; Keith E. Witek, Reg. No. 37,475; Michael P. Noonan, Reg. No. 42,038; Joanna P. Gariazzo, Reg. No. 43,629; Robert A. Rodriguez, Reg. No. 45,049; Steven G. Parmelee, Reg. No. 28,790; J. Ray Wood, Reg. No. 36,062; Daniel K. Nichols, Reg. No. 29,420.

Direct all telephone calls to Mr. Robert A. Rodriguez at telephone no. (512) 996-6839.

Address all correspondence to Harry A. Wolin, Motorola, Inc., Austin Intellectual Property Law Section, 7700 West Parmer Lane, MD: TX32/PL02, Austin, Texas 78729.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

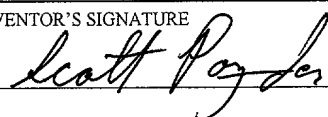FULL NAME OF FIRST INVENTOR: Scott K. Pozder	INVENTOR'S SIGNATURE 	DATE: 18 November 1999
RESIDENCE: 606 Upson Street, Austin, Texas 78703		CITIZENSHIP: United States
POST OFFICE ADDRESS: Same as above		

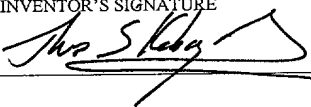FULL NAME OF SECOND INVENTOR: Thomas S. Kobayashi	INVENTOR'S SIGNATURE 	DATE: 18 Nov 99
RESIDENCE: 1014 Reagan Terrace, Austin, Texas 78704	CITIZENSHIP United States	
POST OFFICE ADDRESS: Same as above		